






# CO<sub>2</sub>

## Extinguishers

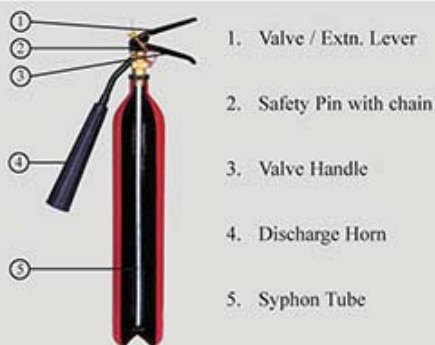

Wall Bracket

MODEL	CD 5G	CD 2G
Capacity	5 Kg.	2 Kg.
Fire Rating	55B	21B
Average Discharge Time	9.5 Sec	9 Sec.
Height	720 mm	630 mm
Diameter	139.7 mm	101.6 mm
Filled Weight	17.5 kg.	8.2 kg.
Empty Weight	12.5 kg.	6.2 kg.
Operating Temperature	-20°C to + 60°C	-20°C to + 60°C
Maximum Service Pressure	169 bar	169 bar
Test Pressure	250 bar	250 bar

Model	A	B	C	D	F
CD 2G		21 B			
CD 5G		55 B			

### Product description

SFFECO CO<sub>2</sub> gas extinguishers are characterised by their high performance for fires involving an electrical risk like computers, office equipment and generators etc. CO<sub>2</sub> is non-conductive, clean and safe, ensuring minimal damage to electrical equipment and furnishings.

Suitable for Class B fire risks

### Features:

- Carbon Dioxide, gases agent, colorless, odorless, non-Toxic provide rapid knock down of industrial fire. Capable of fighting Class B fire.
- Kite Mark Certified to BS EN 3
- Seamless Steel body (Lightweight)
- High Quality Polyester Powder Coated Paint
- Controlled Discharge
- Brass head valve with simple squeeze operations provided with pressure relieve disc.
- Rechargeable & easy to service.
- Non conductive agent for electrical use without risk to operator
- CO<sub>2</sub> gas disappears quickly leaving no residue
- Swivel horn with no freeze burn, with greater directional control of CO<sub>2</sub> discharge through horn rotation feature.
- 2Kg is available now with the 55 B Fire rating as efficient as 5Kg unit.

**Ideal Use:** Chemical Manufacturing Plant, Oil Rigs, Rail Yards, Warehouses, Construction sites, parking garages, Airport, Boat & Docks and Large laboratories.

