

Resilient-Seated Gate Valves Outside Screw and Yoke

General Description

TYCO Resilient-Seated Gate Valves are used in Fire Protection Systems for on/off operation. End connection configurations including Flange by Flange, Flange by Groove, and Groove by Groove are available.

The ductile Iron body weighs approximately 50% less than conventional cast iron valves, which allows easier handling on site and reduced shipping costs.

The fully encapsulated EPDM ductile iron Wedge ensures bubble-tight sealing.

Valve components are either inherently corrosion-resistant or protected with fusion-bonded epoxy resin coating for a long, dependable service life and enhanced UV protection in exposed installations.

This valve is one of the lightest, most durable gate valves on the market today. Its design features and material selection criteria fulfill the need for a dependable, long life and easy to operate gate valve.

NOTICE

Never remove any piping component nor correct or modify any piping deficiencies without first de-pressurizing and draining the system. Failure to do so may result in serious personal injury, property damage, and/or impaired device performance.

It is the designer's responsibility to select products suitable for the intended service and to ensure that pressure ratings and performance data are not exceeded. Material and gasket selection should be verified for compatibility with the specific application. Always read and understand the installation instructions.

TYCO Gate Valves described herein must be installed and maintained in compliance with this document, in addition to the standards of any other authorities having jurisdiction. Failure to do so may result in serious personal injury or impair the performance of these devices.

The owner is responsible for maintaining their mechanical system and devices in proper operating condition. The installing contractor or device manufacturer should be contacted with any questions.



Technical Data

Sizes

2" (DN50), 2-1/2" (DN65), 3" (DN80), 4" (DN100), 6" (DN150), 8" (DN200), 10" (DN250), and 12" (DN300)

Approvals

UL Listed
FM Approved

Maximum Working Pressure

UL - 300 psi (20,87 bar)
FM - 232 psi (16 bar)

Flanges

ASME B16.1/ASME B16.42
EN 1092-2/ISO 7005-2
Drilled to ANSI 125/150 or PN10/PN16

Materials of Construction

See valve parts list, Figure 1.

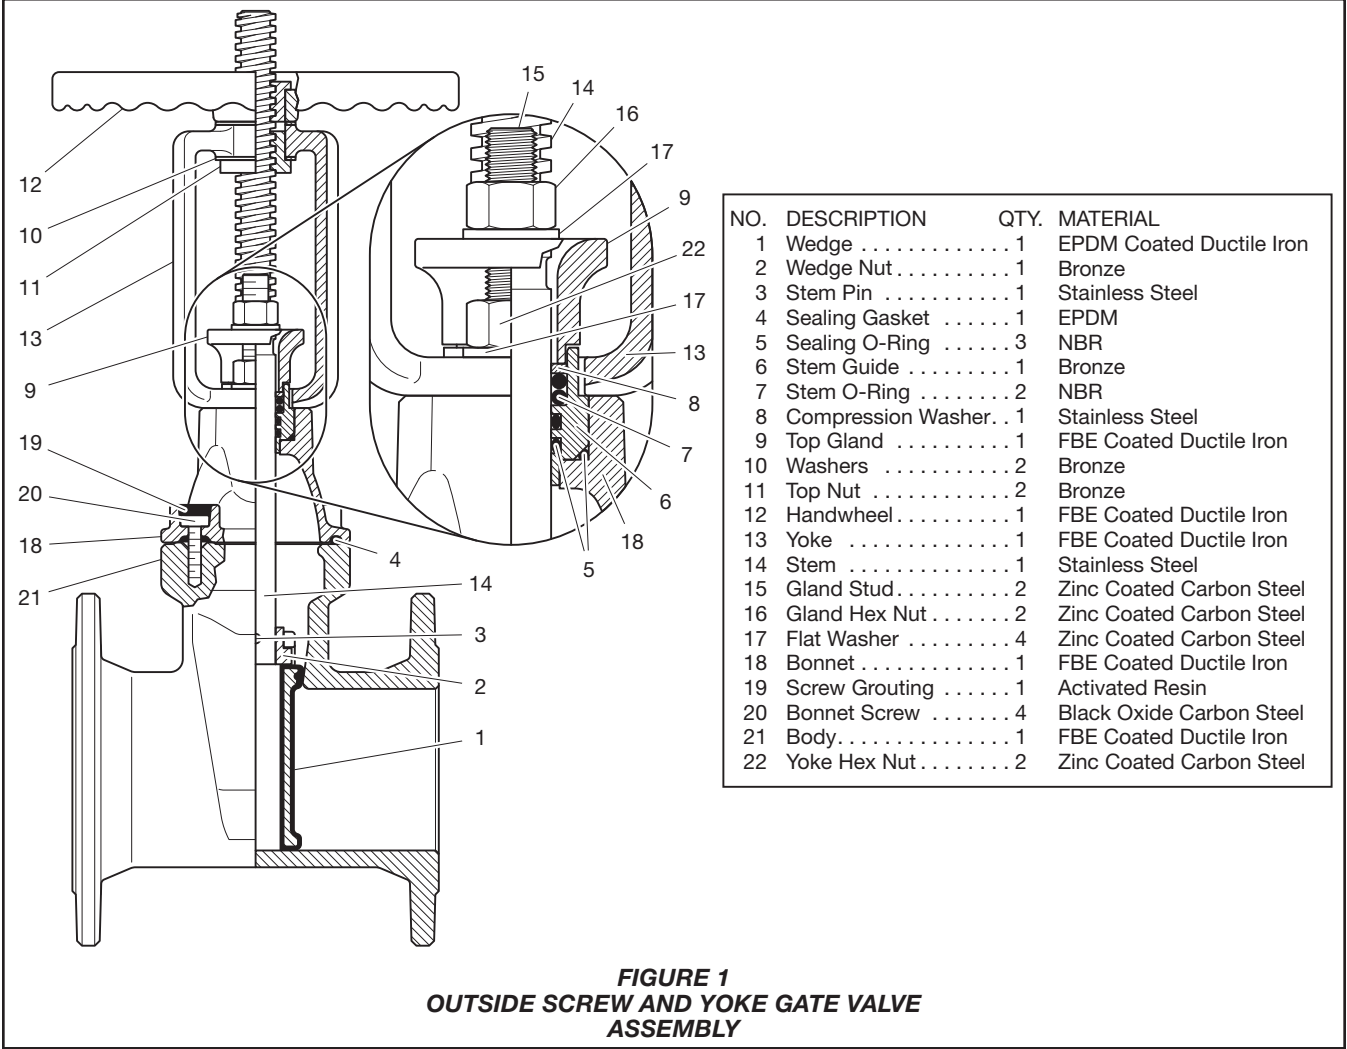


FIGURE 1
OUTSIDE SCREW AND YOKE GATE VALVE
ASSEMBLY

Installation

In piping systems, TYCO Resilient-Seated Gate Valves should be located where operation, inspection, and maintenance are readily accessible.

Care and Maintenance

The TYCO Resilient-Seated Gate Valves must be maintained and serviced in accordance with this section.

Before closing a fire protection system main control valve for maintenance work on the fire protection system that it controls, obtain permission to shut down the affected fire protection system from the proper authorities and notify all personnel who may be affected by this decision.

After placing a fire protection system in service, notify the proper authorities and advise those responsible for monitoring proprietary and/or central station alarms.

The owner is responsible for the inspection, testing, and maintenance of their fire protection system and devices in compliance with this document, as well as with the applicable standards of the National Fire Protection Association (e.g., NFPA 25), in addition to the standards of any authority having jurisdiction. The installing contractor or product manufacturer should be contacted relative to any questions. Any impairments must be immediately corrected.

Automatic sprinkler systems are recommended to be inspected, tested, and maintained by a qualified Inspection Service in accordance with local requirements and/or national codes.


See Figure 1 for valve components referenced in this section.

Debris lodged in the sealing area of the Wedge (1) may cause the valve to close hard. Backing off the Handwheel (12) and closing it again, several times if necessary, can correct this problem.

The valve should never be forced to seat by applying a wrench or extension to the Handwheel (12), as it may distort the valve components or score the sealing surfaces. All replacement parts must be obtained from the manufacturer to assure proper operation of the valve.

At initial valve installation the Gland Hex Nuts (16) should be left only finger tight to allow the Gland (9) to remain in a relaxed state during normal valve operation. For applications where the valve is subject to vibration, a non-hardening thread sealant may be applied to the Gland Hex Nuts (16) to prevent self-loosening and subsequent disengagement of the Gland (9).

If leakage past the Sealing O-Rings (5) occurs, evenly tighten the Gland Hex Nuts (16) until the leakage ceases.

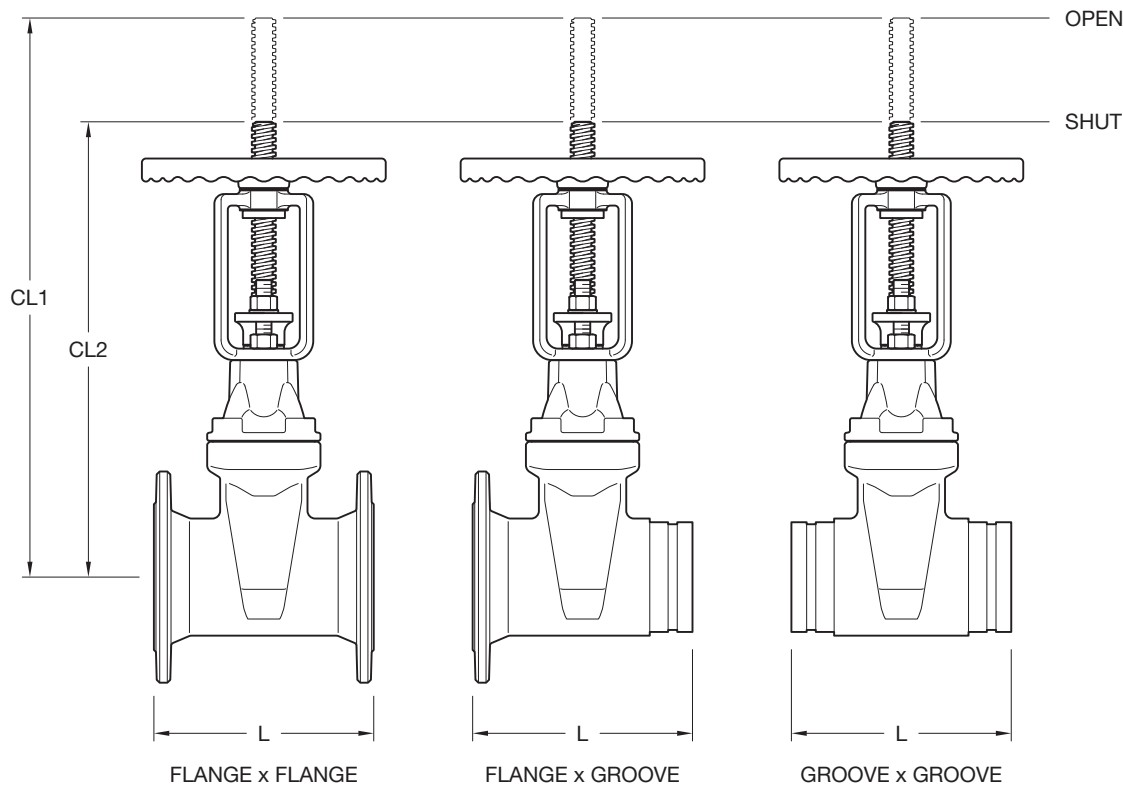

Nominal Valve Size	Nominal Pipe Size	Nominal Dimensions Inches (mm)			Nominal Handwheel Turns to Fully Operate (Open or Shut)	Approx. Weight F x F Lbs. (kg)	Approx. Weight F x G Lbs. (kg)	Approx. Weight G x G Lbs. (kg)
		L	CL1	CL2				
2 DN50	2.375 (60,3)	7.00 (178)	15.55 (395)	13.07 (332)	13	29.8 (13,5)	27.6 (12,5)	25.4 (11,5)
2-1/2 DN65	2.875 (73,0)	7.50 (190)	16.14 (410)	13.31 (338)	16	35.3 (16)	30.9 (14)	26.5 (12)
– DN65	3.000 (76,1)	7.50 (190)	16.14 (410)	13.31 (338)	16	–	30.9 (14)	26.5 (12)
3 DN80	3.500 (88,9)	8.00 (203)	18.9 (480)	14.96 (380)	20	41.9 (19)	36.4 (16,5)	30.9 (14)
4 DN100	4.500 (114,3)	9.00 (229)	22.56 (573)	17.72 (450)	20	57.3 (26)	50.7 (23)	44.1 (20)
– DN150	6.500 (165,1)	10.50 (267)	29.53 (750)	23.31 (592)	25	–	88.2 (40)	79.4 (36)
6 DN150	6.625 (168,3)	10.50 (267)	29.53 (750)	23.31 (592)	25	97.0 (44)	88.2 (40)	79.4 (36)
8 DN200	8.625 (219,1)	11.50 (292)	37.64 (956)	29.45 (748)	34	154.4 (70)	143.3 (65)	110.3 (50)
10 DN250	10.750 (273,1)	13.00 (330)	46.26 (1175)	34.96 (888)	42	264.6 (120)	242.6 (110)	220.5 (100)
12 DN300	12.750 (323,9)	14.00 (356)	51.89 (1318)	39.57 (1005)	50	330.8 (150)	297.7 (135)	275.6 (125)

FIGURE 2
OUTSIDE SCREW AND YOKE GATE VALVE
NOMINAL DIMENSIONS

Nominal Valve Size	Nominal Dimensions in Inches (mm)					
	ANSI Class 150			ISO 7005-2 PN16		
	Dim. A	Dim. B	Qty. N	Dim. A	Dim. B	Qty. N
2 DN50	4.75 (120,5)	0.75 (19)	4	4.92 (125,0)	0.75 (19)	4
2-1/2 DN65	5.50 (139,5)	0.75 (19)	4	5.71 (145,0)	0.75 (19)	4
3 DN80	6.00 (152,5)	0.75 (19)	4	6.30 (160,0)	0.75 (19)	8
4 DN100	7.50 (190,5)	0.75 (19)	8	7.09 (180,0)	0.75 (19)	8
6 DN150	9.50 (241,5)	0.88 (22)	8	9.45 (240,0)	0.88 (23)	8
8 DN200	11.75 (298,5)	0.88 (22)	8	11.61 (295,0)	0.88 (23)	12
10 DN250	14.25 (362,0)	1.00 (25)	12	13.98 (355,0)	1.13 (28)	12
12 DN300	17.00 (432,0)	1.00 (25)	12	16.14 (410,0)	1.13 (28)	12


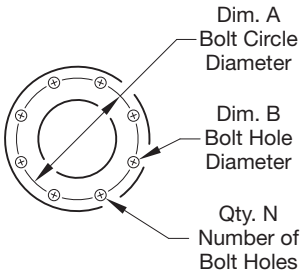


FIGURE 3
GATE VALVE FLANGE
NOMINAL DIMENSIONS

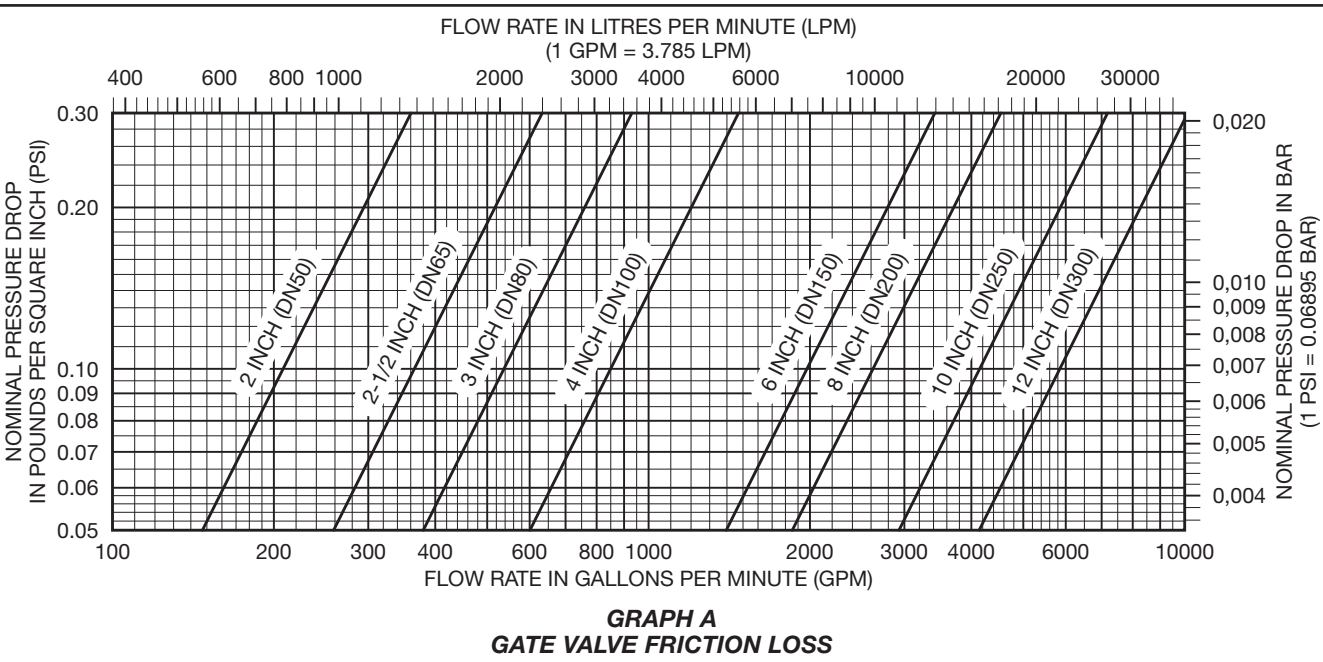

Nominal Valve Size	Nominal Pipe Size	Part Number				
ANSI Inches DN	O.D. Inches (mm)	Flange x Flange ANSI Class 150	Flange x Flange ISO 7005-2 PN16	Flange x Groove ANSI Class 150	Flange x Groove ISO 7005-2 PN16	Groove x Groove
2 DN50	2.375 (60,3)	TMRX-050-000-3	TMRX-050-000-1	TMRT-050-060-3	TMRT-050-060-1	TMRG-050-060-4
2-1/2 DN65	2.875 (73,0)	TMRX-065-000-3	TMRX-065-000-1	TMRT-065-073-3	TMRT-065-073-1	TMRG-065-073-4
— DN65	3.000 (76,1)	—	—	TMRT-065-076-3	TMRT-065-076-1	TMRG-065-076-4
3 DN80	3.500 (88,9)	TMRX-080-000-3	TMRX-080-000-1	TMRT-080-089-3	TMRT-080-089-1	TMRG-080-089-4
4 DN100	4.500 (114,3)	TMRX-100-000-3	TMRX-100-000-1	TMRT-100-114-3	TMRT-100-114-1	TMRG-100-114-4
— DN150	6.500 (165,1)	—	—	TMRT-150-165-3	TMRT-150-165-1	TMRG-150-165-4
6 DN150	6.625 (168,3)	TMRX-150-000-3	TMRX-150-000-1	TMRT-150-168-3	TMRT-150-168-1	TMRG-150-168-4
8 DN200	8.625 (219,1)	TMRX-200-000-3	TMRX-200-000-1	TMRT-200-219-3	TMRT-200-219-1	TMRG-200-219-4
10 DN250	10.750 (273,1)	TMRX-250-000-3	TMRX-250-000-1	TMRT-250-273-3	TMRT-250-273-1	TMRG-250-273-4
12 DN300	12.750 (323,9)	TMRX-300-000-3	TMRX-300-000-1	TMRT-300-324-3	TMRT-300-324-1	TMRG-300-324-4

TABLE A
OUTSIDE SCREW AND YOKE GATE VALVE
PART NUMBERS

Ordering Procedure

Contact your local distributor for availability. When placing an order, indicate the full product name and Part Number (P/N). Refer to Table A for a complete list of part numbers.

